

Stationary

NICD

NICD POCKET PLATE M-RANGE


M-Series Medium Discharge Rate nickel cadmium battery is made of pocket plate. The battery is suitable for medium discharge periods between 30 minutes and 5 hours such as standby for UPS, gas turbine control. etc.



BENEFITS

- Easy storage & installation
- Low maintenance
- Deep cycle ability
- Wide operating temperature range (-40°C to +70°C)
- Superior reliability
- Excellent fast charging ability
- Long service life
- Assured quality
- Prolonged warranty

SERVICE LIFE: 1300 CYCLES DOD 80%

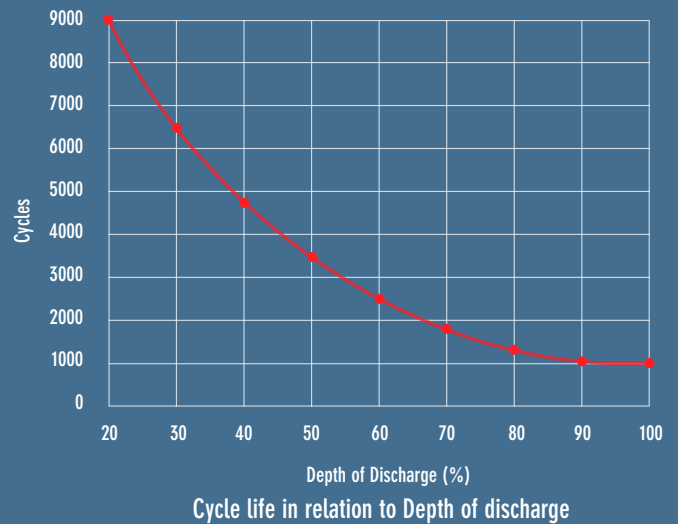

APPLICATIONS



Railway



Telecom



Solar



UPS



Marine

TECHNICAL INFORMATION

For more details about layouts & terminals, flip to page 75 for more information.



Ref.	Voltage (V)	Capacity (Ah/CS)	Dimensions (mm)			Weight (kg)	Terminals
			X	Y	H		
M-series - Medium Discharge Rate Type							
NiCd10-M	1,2	10	43	85	260	1,20	M10
NiCd20-M	1,2	20	55	134	270	1,90	M10
NiCd30-M	1,2	30	55	134	270	2,40	M10
NiCd40-M	1,2	40	60	140	270	3,60	M10
NiCd50-M	1,2	50	70	140	295	4,20	M16
NiCd60-M	1,2	60	70	140	295	4,40	M16
NiCd70-M	1,2	70	70	140	295	4,60	M16
NiCd80-M	1,2	80	80	140	365	6,50	M16
NiCd90-M	1,2	90	80	140	365	6,70	M16
NiCd100-M	1,2	100	105	165	345	9,20	M20
NiCd120-M	1,2	120	105	165	345	9,50	M20
NiCd150-M	1,2	150	165	167	345	12,50	M20
NiCd200-M	1,2	200	165	167	345	14,00	M20
NiCd250-M	1,2	250	140	280	450	21,50	2 x M16
NiCd300-M	1,2	300	140	280	450	22,50	2 x M16
NiCd350-M	1,2	350	170	285	350	24,00	2 x M20
NiCd400-M	1,2	400	175	285	500	32,00	2 x M20
NiCd500-M	1,2	500	175	285	500	37,00	2 x M20
NiCd600-M	1,2	600	175	285	500	40,00	2 x M20
NiCd700-M	1,2	700	186	398	565	55,00	3 x M20
NiCd800-M	1,2	800	186	398	565	58,00	3 x M20
NiCd900-M	1,2	900	186	398	565	61,00	3 x M20
NiCd1000-M	1,2	1000	186	398	565	64,00	3 x M20
NiCd1100-M	1,2	1100	186	398	565	66,00	3 x M20

TECHNICAL INFORMATION

Layout					
0	1	2	3	4	
4	6	9	6 Volt: 0	6 Volt: 1	
Terminals					
Flag	T1	T2	M5	M6	M8

Heights		
T1, T2	M5, M6, M8*	1, 3, Flag,...
*Height without bolt.		

Dimensions are overall dimensions including the terminals