

# FUSES FOR BATTERY CHARGERS

## ▶ DIN 72581 CERAMIC

Centre distance: 30



Ref.	Amp.
BAT/18200	30
BAT/18202	50
BAT/18204	80
BAT/18206	100
BAT/18208	150

## ▶ DIN 72582 CERAMIC

Centre distance / Abstand zur Mitte: 30



Ref.	Amp.
BAT/17120	30
BAT/17121	50
BAT/17122	80
BAT/17126	100
BAT/18214	150

## ▶ DIN 43561 CERAMIC


Centre distance: 60



Ref.	Amp.
BAT/17661	35
BAT/18218	40
BAT/17662	50
BAT/18220	63
BAT/18222	80
BAT/17663	100
BAT/18224	125
BAT/18226	135
BAT/18228	150
BAT/18230	160
BAT/18232	175
BAT/18234	200
BAT/18236	225
BAT/17565	250
BAT/17569	275
BAT/17566	300
BAT/18238	325
BAT/17567	355
BAT/17412	400
BAT/18240	425
BAT/18242	500

## ▶ DIN 43560 CERAMIC

Centre distance: 60

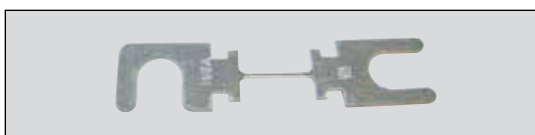

Ref.	Amp.
BAT/16669	35
BAT/16670	40
BAT/16671	50
BAT/16672	63
BAT/16673	80
BAT/16674	100
BAT/17129	125
BAT/17132	135
BAT/17135	150
BAT/17137	160
BAT/17139	175
BAT/17141	200
BAT/18247	225
BAT/18249	250
BAT/18251	275
BAT/18253	300
BAT/18255	325
BAT/18257	355
BAT/18259	400
BAT/18261	425
BAT/18263	500

## ▶ TYPE LED 240V

Centre distance: 42



Ref.	Amp.
BAT/18426	25
BAT/18428	32
BAT/18430	35
BAT/18432	50
BAT/18434	63
BAT/18436	80
BAT/18438	100
BAT/18440	125
BAT/18442	160
BAT/18444	180